



CUSTOMER DETAILS

DELIVERY ADDRESS

PAGE **OF**









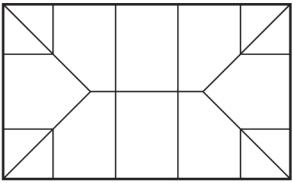
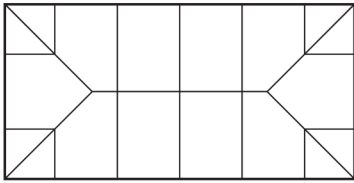

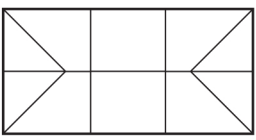

REFERENCE

REQUIRED DATE

QUOTE NUMBER

DIMENSIONS (measure to outside of the upstand) **Width mm** **Height mm**

RIDGE RAFTER BAR SPACINGS MUST NOT EXCEED 2000mm, REGARDLESS OF ROOF STYLE

 STYLE 1 L W Min. 600 600 Max. 2400 2400	 STYLE 2 L W Min. 800 600 Max. 3000 2400	 STYLE 3 L W Min. 1200 600 Max. 4000 2400	 STYLE 4* L W Min. 2400 600 Max. 6000 2400	 STYLE 5* L W Min. 3000 600 Max. 6000 2400
 STYLE 6 L W Min. 1800 1800 Max. 3200 3200	 STYLE 7 L W Min. 2000 1800 Max. 3400 3200	 STYLE 8 L W Min. 2000 1800 Max. 4000 3200	 STYLE 9* L W Min. 3000 1800 Max. 6000 3200	 STYLE 10* L W Min. 3600 1800 Max. 6000 3200
 STYLE 11 L W Min. 1600 1400 Max. 4000 3200	 STYLE 12* L W Min. 2400 1400 Max. 6000 3200	 STYLE 13* L W Min. 3000 1400 Max. 6000 3200		

STYLES MARKED WITH AN * CAN INCORPORATE AN OPTIONAL SheerVENT IF REQUIRED - MARK AN 'V' IN EACH POSITION FOR SheerVENT PLACEMENT

COLOUR	Exterior	Interior
Pure White RAL9010		
Anthracite Grey RAL7016		
Jet Black RAL9005		

SheerVENT OPTIONS	Exterior	Interior
Number of Vents		
Number of Remote Controls		
Rain Sensor (if required)		

GLAZING	Standard	Laminate	Thermal
28mm DGU Construction	4/20/4	4/18/6.8	6/16/6
U-Value Wm ² K	1.0	1.2	1.0
Tint Colour			
Clear			
Ultra Grey			
Sunshade Blue			
Aqua			
Blue			
Neutral			
Bronze			
Unglazed			
High-Security Upgrade The High Security Upgrade requires laminated glass			

† Please be aware SheerVENT must be connected by a qualified electrician.

SIGNATURE

PRINT NAME

DATE / /

TECHNICAL INFORMATION

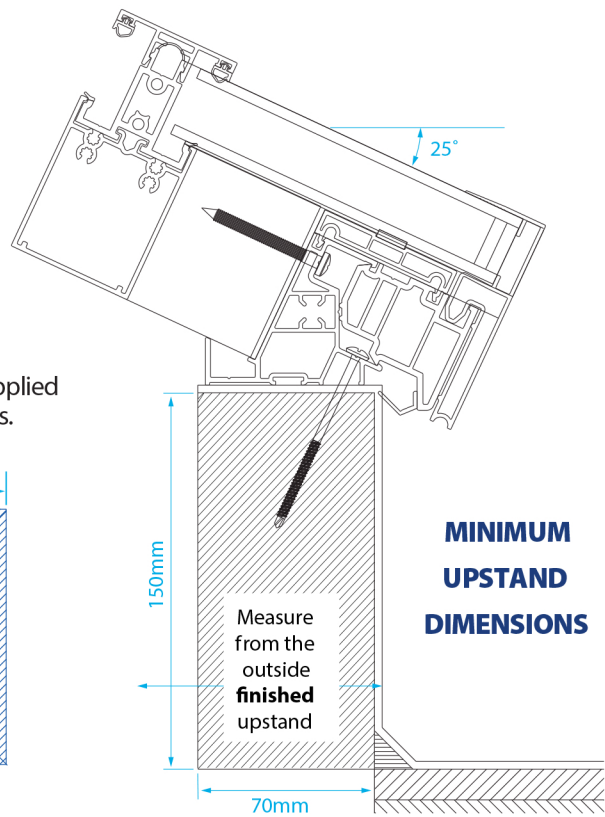
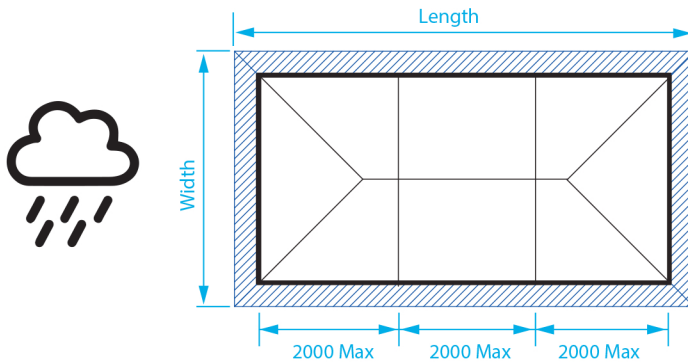
25° pitch

50mm sightlines

Rafter, hip, jack rafters and ridge

1.2KN/m² snowload

The lantern design assumes that the eaves beam is fully supported along all edges by a structural upstand capable of resisting the full vertical (as well as any lateral spread loads) applied by the lantern roof self-weight plus imposed snow/wind loads.



RIDGE RAFTER BAR SPACINGS MUST NOT EXCEED 2000mm, REGARDLESS OF ROOF STYLE

SheerVENT FLUSH INTELLIGENT VENTILATION

With a sleek minimalist design that sits perfectly flush with S1's rafter bars, and with powered actuators that can be intelligently automated - With a sleek minimalist design that sits perfectly flush with S1's rafter bars, and with powered actuators that can be intelligently automated - reimagined roof vents - bringing them into the 21st century at last.

Eliminating the need for muntin bars, SheerVENT offers reliable ventilation without the risk of leaks.

SheerVENT

MIN. WIDTH: 600mm MAX. WIDTH: 1000mm

MIN. ROOF WIDTH TO ACCOMMODATE SheerVENT IS 1000mm

Electrical requirements for powered SheerVENT® installations: **Actuator** – this needs wiring to a 24V combined Control Box/Switch (supplied) by a qualified electrician. Additional cabling (not supplied) may be required depending on switch location.

Control Box/Switch - this requires wiring to a standard 240V electrical supply by a qualified electrician. Cabling not supplied.

Optional Remote – requires 1 x CR2430 battery, not supplied. Can control up to 4 vents.

Optional Rain Sensor – requires 1 x 9V battery, not supplied. Neither sensor requires wiring to the Control Box/ Switch. All Electrical components are covered by a 12 month guarantee.