





ROOF STYLES

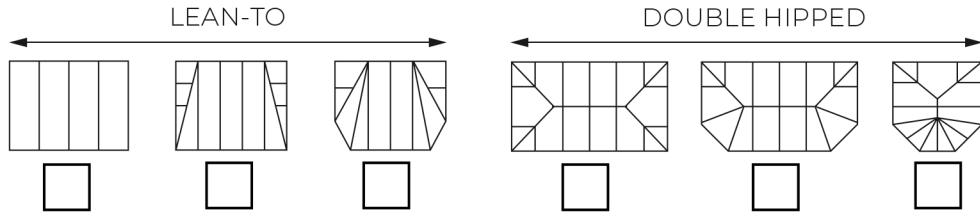

VICTORIAN / EDWARDIAN

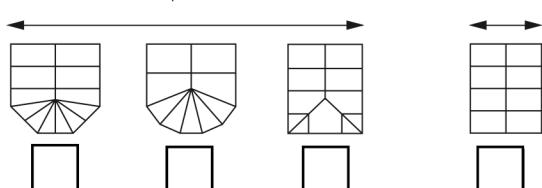

GABLE

SPECIAL
See drawing

RIDGE SUPPORT PREFERENCE (if required)

TIE BAR


RIDGE SUPPORT BEAM

TIMBER TRUSS

ROOF SPECIFICATION

STANDARD ROOF SPECIFICATION

This roof specification meets building Regulations for England & Wales for new build or roof replacements. As the Internal Insulated Plasterboard has increased by 10mm to 72mm please note a packer may be required to the top of the window frame.

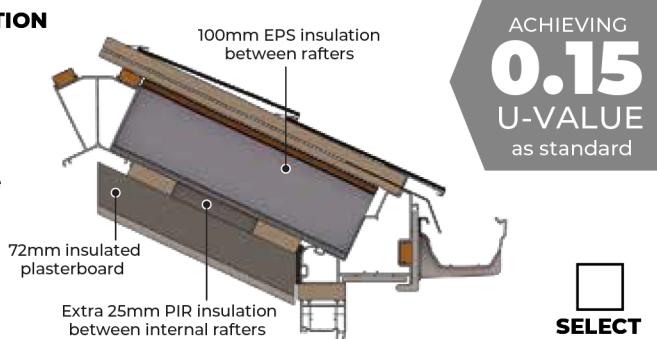

(FRAME PACKER NOT SUPPLIED BY SHEERLINE BESPOKE)

OPTIONAL ROOF SPECIFICATIONS

0.15 U-VALUE VENTILATED

This extra ventilated roof specification has been developed typically for areas of the UK that are required to meet U-Value ventilation requirements. Please note roofs will be fabricated with deeper rafter battens and eaves vents for increased air flow.

(FRAME PACKER NOT SUPPLIED BY SHEERLINE BESPOKE)

0.12 U-VALUE

This roof specification requires 120mm PIR insulation for in between the rafters. An additional 25mm of PIR insulation is included, this is fabricated to be installed either above or below the aluminium frame. Please call us to discuss these options further. 82mm insulated boards are supplied, a timber packer may be required to the top of the window frame.

(FRAME PACKER NOT SUPPLIED BY SHEERLINE BESPOKE)

JOB DETAILS

NAME _____

REFERENCE _____

CONTACT NUMBER _____

EMAIL _____

ADDRESS _____

SITE POSTCODE _____

PREFERRED DELIVERY DATE _____

NOTES _____

YOUR DETAILS

NAME _____

COMPANY _____

CONTACT NUMBER _____

EMAIL _____

ADDRESS _____

POSTCODE _____

SIGNATURE _____

