



DIMENSIONS

(Measure to internal frame dimensions, mark on any wall positions and advise frame thickness.)

PROJECTION (MM) **WIDTH (MM)**

**TO IDENTIFY REQUIREMENTS FOR EAVES REINFORCEMENT,
PLEASE SPECIFY DOOR POSITIONS AND WIDTHS**

SKETCH YOUR DESIGN HERE
INCLUDE RAFTER SPACING AND MARK THE POSITION OF ANY SHEERVENT®(S) REQUIRED

FRAME WIDTH (MM)

MARK 'X' ON DOWNPipe POSITION **MARK 'V' ON SHEERVENT POSITION**

QUOTE / ORDER

JOB / DELIVERY DETAILS

NAME _____

REFERENCE _____

CONTACT NUMBER _____

EMAIL _____

DELIVERY ADDRESS _____

SITE POSTCODE _____

PREFERRED DELIVERY DATE _____

NOTES _____

YOUR DETAILS

NAME _____

COMPANY _____

CONTACT NUMBER _____

EMAIL _____

ADDRESS _____

POSTCODE _____

SIGNATURE _____

Rafter Bar Spacings Must Not Exceed 1000mm

COLOUR MATT FINISH	EXT.	INT.
PURE WHITE 9010	<input type="checkbox"/>	<input type="checkbox"/>
ANTHRACITE GREY 7016	<input type="checkbox"/>	<input type="checkbox"/>
JET BLACK 9005	<input type="checkbox"/>	<input type="checkbox"/>
GUTTER STYLE		
OGEE	<input type="checkbox"/>	<input type="checkbox"/>
SQUARE	<input type="checkbox"/>	<input type="checkbox"/>
DNPIPE		
OFFSET	<input type="checkbox"/>	<input type="checkbox"/>
STRAIGHT	<input type="checkbox"/>	<input type="checkbox"/>

GLAZING 28MM TINT COLOUR	STANDARD 4/20/4 1.0 U-VALUE	LAMINATE 4/18/6.8 1.2 U-VALUE	THERMAL 6/16/6 1.0 U-VALUE
CLEAR	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
ULTRA GREY	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SUNSHADE BLUE	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
AQUA	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
BLUE	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
NEUTRAL	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
BRONZE	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
UNCLAZED* FOR 28MM	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
HIGH SECURITY UPGRADE			<input type="checkbox"/>



The high
security
upgrade
requires
Laminate
glass

SHEERVENT® OPTIONS

*SheerVent® is not available unglazed. Available on roofs with equal to or greater than 10° pitch.

NO. OF VENTS _____

NO. OF REMOTES _____

RAIN SENSOR (if required)

ANGLE (From 2.5° to 30°) _____ (If known)


FRAME HEIGHT (MM)

RIDGE HEIGHT (MM)

†Please be aware SheerVent® must be connected by a qualified electrician.

NOT TO SCALE

Wall Plate Positioning

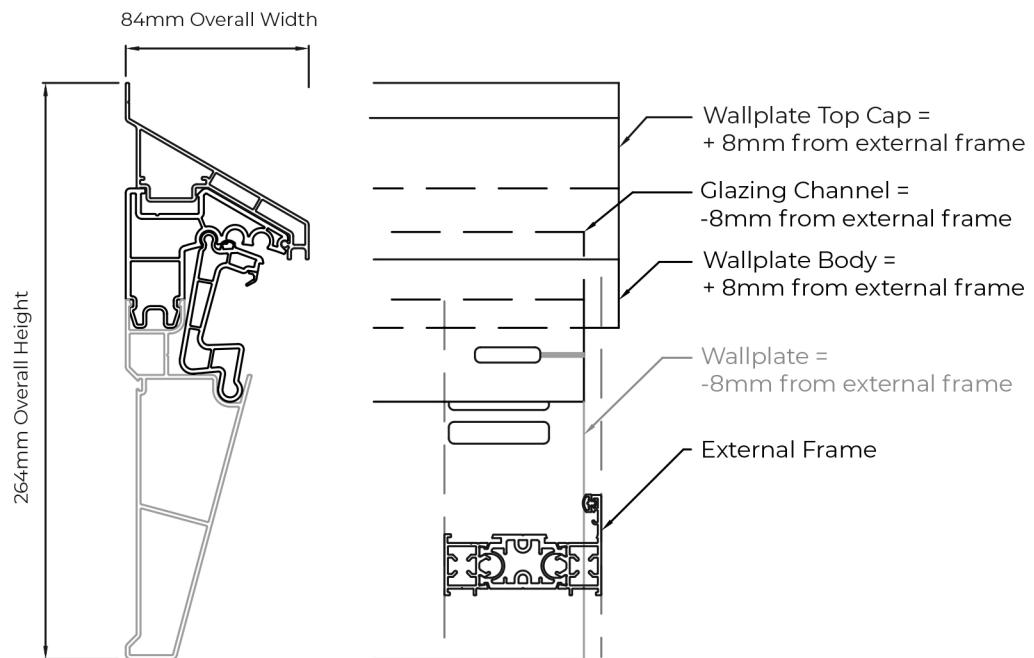

Eaves Beam Assembly and Positioning

